



# XC4240

Reliability. Security. Performance.



XC4240



This is a Class A device according to international electromagnetic emissions standards (i.e., FCC Rules, EN 55022/EN 55032, etc.). Class A products are intended for use in non-residential/non-domestic environments. Use of a Class A product in residential/domestic environments may cause interference to radio communications and require corrective measures.

# Lexmark XC4240

With its tilting 7-inch class/17.8-cm e-Task touch screen and enhanced accessibility features, the multi-function Lexmark XC4240 helps you get more done. Get colour output as fast as 40 ppm\* and scanning up to 100 images per minute plus standard hard drive and OCR.

## Ready when you are

- ▶ 1.2-GHz quad-core processor and up to 6 GB memory drives printing at up to 40 ppm.\*
- ▶ Scan at up to 50 pages per minute, or 100 images per minute for two-sided documents.
- ▶ Standard hard drive improves system performance, enhances scanning capabilities and includes additional productivity and convenience apps, including OCR.
- ▶ Steel frame and durable design stands up to heavy use and harsh environments.
- ▶ Long-life fuser and imaging components extend uptime.
- ▶ Unison™ Toner replacement cartridges deliver up to 6000 colour and 9000 monochrome pages\*\*.
- ▶ Keep printing in black even when colour toner is empty.

## Colour that keeps saving

- ▶ PANTONE® calibration, embedded colour sample pages and Lexmark Colour Replacement produce accurate, professional colour output in house.
- ▶ Save toner with suite of tools that let you choose when and how much colour to print.

## Input that works


- ▶ Reliable, flexible media handling supports cardstock, small media, and envelopes from the main tray or a convenient single-sheet feeder.
- ▶ 251 pages of standard input can grow to 1451.

## Interact with ease

- ▶ Tilttable 7-inch class/17.8-cm e-Task touch screen comes with convenience and productivity apps and is customizable to meet your needs.
- ▶ Front USB port allows walk-up printing from popular file formats without a computer.
- ▶ Compact footprint allows flexible placement in more locations.
- ▶ Connect easily via Ethernet, USB, or simple mobile printing options.

## Full-spectrum security

- ▶ Lexmark's full-spectrum security architecture helps keep your information safe—in the document, on the device and over the network.
- ▶ Keypoint Intelligence - Buyers Lab honored Lexmark with a prestigious BLI PaceSetter award for Document Imaging Security\*\*\*.

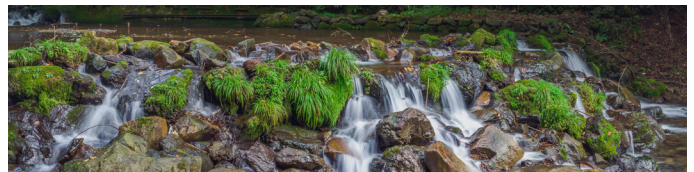

## Built for planet earth

- ▶ Energy management features reduce power consumption in active use or sleep mode.
- ▶ Standard two-sided printing saves paper.
- ▶ Recycle cartridges through the award-winning Lexmark Cartridge Collection Program (LCCP).

\*Print and copy speeds measured in accordance with ISO/IEC 24734 and ISO/IEC 24735 respectively (ESAT). For more information see: [www.lexmark.com/ISOspeeds](http://www.lexmark.com/ISOspeeds).

\*\*Average yield based on approximately 5% print coverage.

\*\*\*Award based on North America and/or Western Europe data

# Lexmark XC4240



- 1 Multi-function product with 7-inch class/17.8-cm e-Task colour touch screen  
18.2 x 17.4 x 23.9 inches  
462 x 442 x 608 mm
- 2 650-sheet duo tray  
5.2 x 16.7 x 16.4 inches  
133 x 424 x 416 mm
- 3 Keyboard  
1 x 11 x 5.1 inches  
25 x 280 x 130 mm

- 4 550-sheet tray  
5.2 x 16.7 x 16.4 inches  
133 x 424 x 416 mm

#### Adjustable printer stand (not shown)

20.5 x 25.7 x 24.6 inches  
521 x 653 x 625 mm

#### Swivel cabinet (not shown)

10.4 x 18.7 x 23.6 inches  
263 x 476 x 600 mm

- Standard
- Optional

Note 1: Supports one optional 650-sheet duo tray; or one optional 650-sheet duo tray and one optional 550-sheet tray with the 650-sheet duo tray on top.

Note 2: All measurements are shown as height x width x depth. For more information about supported configurations, refer to the Printer, Option and Stand Compatibility Guide at [http://www.lexmark.com/publications/furniture\\_safety/](http://www.lexmark.com/publications/furniture_safety/)

© 2018 Lexmark. All rights reserved.

Lexmark, the Lexmark logo and Unison are trademarks of Lexmark International, Inc., registered in the United States and/or other countries. AirPrint and the AirPrint Logo are trademarks of Apple, Inc. Google Cloud Print is a trademark of Google, Inc. MOPRIA®, the Mopria® Logo™ and the Mopria® Alliance logos are trademarks, service marks, and certification marks of Mopria Alliance, Inc. in the United States and other countries. PANTONE®, PANTONE® Goe™ and other Pantone, Inc. trademarks are property of Pantone, Inc. All other trademarks are the property of their respective owners.

This product includes software developed by the OpenSSL Project for use in the Open SSL Toolkit (<http://www.openssl.org/>).

| Product specifications  |  | Lexmark XC4240 |
|---|--|----------------|
| <b>Printing</b>   |  |                |
| Display   | Lexmark e-Task 7-inch (17.8 cm) colour touch screen  |                |
| Print Speed: Up to <sup>6</sup>                                 | Black: 40 ppm / Colour: 40 ppm   |                |
| Time to First Page: As fast as / Time to First Page: as fast as | Black: <8 seconds / Colour: <8 seconds   |                |
| Print Resolution  | Black: 1200 x 1200 dpi, 4800 Color Quality (2400 x 600 dpi) / Colour: 1200 x 1200 dpi, 4800 Color Quality (2400 x 600 dpi)   |                |
| Memory  | Standard: 2048 MB / Maximum: 6144 MB   |                |
| Hard Disk   | Included in configuration  |                |
| Recommended Monthly Page Volume <sup>2</sup>                    | 1500 - 10000 pages   |                |
| Maximum Monthly Duty Cycle: Up to <sup>3</sup>                  | 100000 pages per month   |                |
| <b>Copying</b>  |  |                |
| Copy Speed: Up to <sup>6</sup>                                  | Black: 40 cpm / Colour: 40 cpm   |                |
| Time to First Copy: as fast as                                  | Black: 8 seconds / Colour: 9 seconds   |                |
| <b>Scanning</b>   |  |                |
| Scanner Type / ADF Scan   | Flatbed scanner with ADF / DADF (single pass Duplex)   |                |
| A4/Ltr Duplex Scan Speed: Up to                                 | Black: 94 / 100 sides per minute / Colour: 60 / 64 sides per minute  |                |
| A4/Ltr Simplex Scan Speed: Up to                                | Black: 47 / 50 sides per minute / Colour: 30 / 32 sides per minute   |                |
| ADF Paper Input Capacity: Up to                                 | 100 pages 20 lb or 75 gsm bond   |                |
| <b>Faxing</b>   |  |                |
| Modem Speed   | Max is 33,600 bps, V.34 Half-Duplex Kbps   |                |
| <b>Supplies<sup>7</sup></b>                                     |  |                |
| Laser Cartridge Yields (up to) <sup>1</sup>                     | 6,000-page Colour (CMY) Cartridges, 9,000-page Black Cartridge   |                |
| Photoconductor Estimated Yield: Up to <sup>5</sup>              | 125,000 pages, based on 3 average letter/A4-size pages per print job and ~ 5% coverage   |                |
| Cartridge(s) Shipping with Product <sup>1</sup>                 | 2,000-page Colour (CMY) Return Program Toner Cartridges, 3,000-page Black Starter Return Program Toner Cartridge   |                |
| <b>Paper Handling</b>   |  |                |
| Included Paper Handling   | 250-Sheet Input, 150-Sheet Output Bin, Integrated Duplex, Single-Sheet Manual Feed   |                |
| Optional Paper Handling   | 550-Sheet Tray, 650-Sheet Duo Tray   |                |
| Paper Input Capacity: Up to                                     | Standard: 250+1 pages 20 lb or 75 gsm bond / Maximum: 1450+1 pages 20 lb or 75 gsm bond  |                |
| Paper Output Capacity: Up to                                    | Standard: 150 pages 20 lb or 75 gsm bond / Maximum: 150 pages 20 lb or 75 gsm bond   |                |
| Media Types Supported   | Card Stock, Paper Labels, Plain Paper, Vinyl Labels, Refer to the Paper & Specialty Media Guide  |                |
| Media Sizes Supported   | 10 Envelope, 7 3/4 Envelope, 9 Envelope, A4, A5, B5 Envelope, C5 Envelope, DL Envelope, Hagaki Card, Executive, Folio, JIS-B5, Legal, Letter, Statement, Universal, Oficio, A6                               |                |
| <b>General Information<sup>4</sup></b>                          |  |                |
| Standard Ports  | USB 2.0 Specification Hi-Speed Certified (Type B), Gigabit Ethernet (10/100/1000), Front USB 2.0 Specification Hi-Speed Certified port (Type A), Rear USB 2.0 Specification Hi-Speed Certified port (Type A) |                |
| Optional Network Ports  | Marknet N8372 WiFi Option  |                |
| Noise Level: Operating  | Print: 52 dBA / Copy: 55 dBA / Scan: 51 dBA  |                |
| Specified Operating Environment                                 | Humidity: 8 to 80% Relative Humidity, Altitude: 0 - 3048 meters, Temperature: 10 to 32°C (50 to 90°F)  |                |
| Size (mm - H x W x D) / Weight                                  | 462 x 442 x 608 mm / 27.5 kg   |                |

All information in this brochure is subject to change without notice. Lexmark is not liable for any errors or omissions.

This is a Class A device according to international electromagnetic emissions standards (i.e., FCC Rules, EN 55022/EN 55032, etc.). Class A products are intended for use in non-residential/non-domestic environments. Use of a Class A product in residential/domestic environments may cause interference to radio communications and require corrective measures.

<sup>1</sup>Average yield at approximately 5% print coverage per colour. <sup>2</sup>Recommended Monthly Page Volume" is a range of pages that helps customers evaluate Lexmark's product offerings based on the average number of pages customers plan to print on the device each month. Lexmark recommends that the number of pages per month be within the stated range for optimum device performance, based on factors including: supplies replacement intervals, paper loading intervals, speed, and typical customer usage. <sup>3</sup>Maximum Monthly Duty Cycle" is defined as the maximum number of pages a device could deliver in a month using a multishift operation. This metric provides a comparison of robustness in relation to other Lexmark printers and MFPS. <sup>4</sup>Printers are sold subject to certain license/agreement conditions. See [www.lexmark.com/printerlicense](http://www.lexmark.com/printerlicense) for details. <sup>5</sup>Actual Yield may vary based on other factors such as device speed, paper size and feed orientation, toner coverage, tray source, percentage of black-only printing and average print job complexity. <sup>6</sup>Print and copy speeds measured in accordance with ISO/IEC 24734 and ISO/IEC 24735 respectively (ESAT). For more information see: [www.lexmark.com/ISOspeeds](http://www.lexmark.com/ISOspeeds). <sup>7</sup>Product functions only with replacement cartridges designed for use in a specific geographical region. See [www.lexmark.com/regions](http://www.lexmark.com/regions) for more details.